

### Tecnical Feature

Power Supply:	230VAC (+/-20%) 50/60Hz
Protection:	IP55
Working Temperature:	0 -45°C
Relative Humidity max:	95% (without Condensation)



### Inputs

Flow	Pulses Input optically insulated for high-Frequency Flow Meters (padlewheel or electromagnetic)
EC	Input optically insulated for the ITC Conductivity Sensor.
PH	Input optically insulated for connecting a pH Sensor.
Pressure	4-20mA analogue Input for a Pressure Transmitter.
Activated Area Inputs (controller 3000-6/12)	12-24 V AC/DC Digital Inputs.


### Outputs

6 analogue Outputs 4-20mA for Metering Pumps.

Flow Alarm Output:	Relay Output NO. 24 VAC -1A max.
EC Alarm Output:	Relay Output NO. 24 VAC -1A max.
PH Alarm Output:	Relay Output NO. 24 VAC -1A max.
Pressure Alarm Output:	Relay Output NO. 24 VAC -1A max.

### Communications:

- USB1: for Memory Device USB (pen drive).
- USB2: for permanent connection to PC.

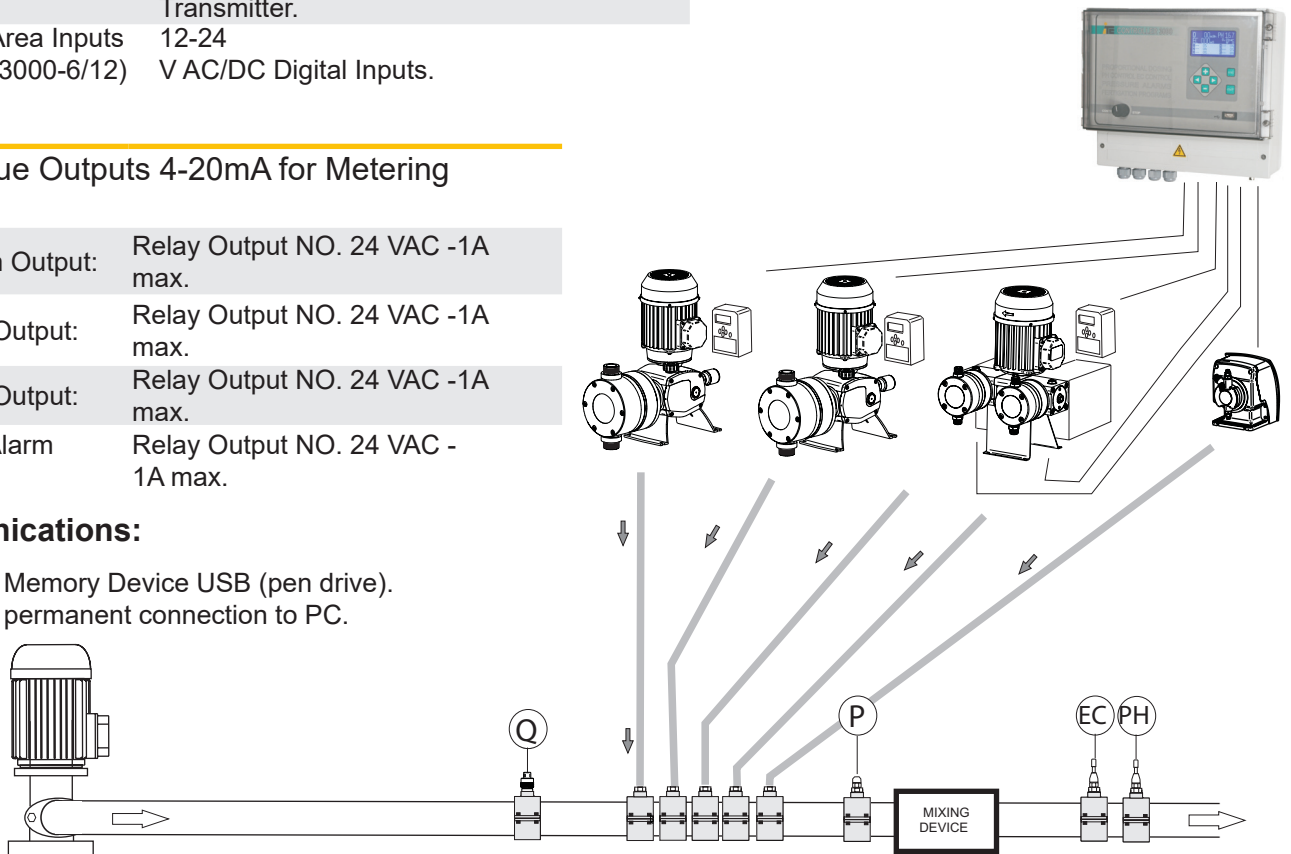

### DIMENSIONES

