


DESCRIPCIÓN

The Multifunction sensor holder is able to hold up to two sensors: pH, RedOx(ORP), electric conductivity(EC), free chlorine (Cl).

Includes automatic flow regulation system, on-line filter and manual sampling point.

Optional to include temperature sensors and proximity sensor for flow failure detection

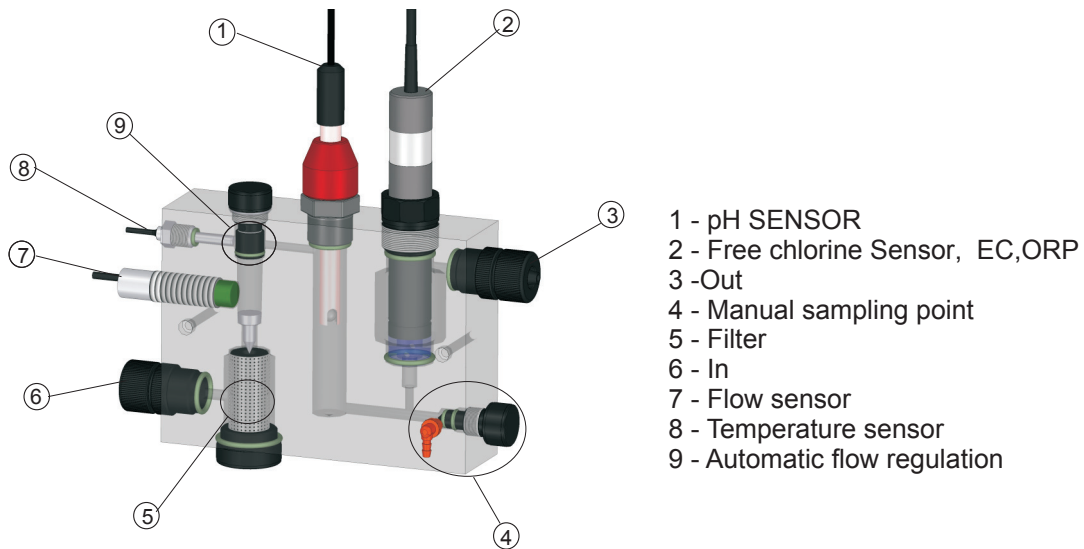

TECHNICAL FEATURES

Materials; PMMA, PP, NBR, SS316
Maximum pressure: 6 bar (87 PSI)
Filter : 100 mesh
Automatic flow regulation: 50 L/H (13GPH)

DIMENSIONS

