

DESCRIPTION


The Multifunction sensor holder is able to hold up to two sensors: pH, RedOx(ORP), electric conductivity(EC), free chlorine (Cl).

Includes automatic flow regulation system, on-line filter and manual sampling point.

Optional to include temperature sensors and proximity sensor for flow failure detection

TECHNICAL FEATURES

Materials:	PMMA, PP, NBR, AISI316
Maximum pressure:	6 bar (87 PSI)
Filter:	100 mesh
Automatic flow regulation:	50 l/h (13GPH)

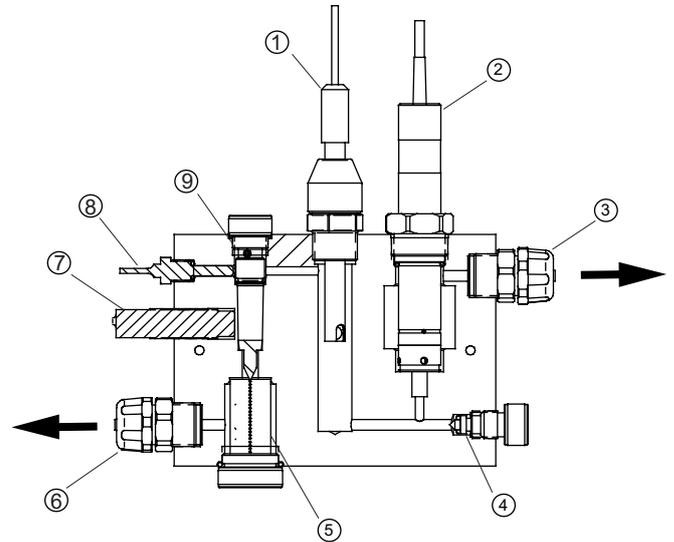

- 1 - pH SENSOR
- 2 - Free chlorine Sensor, EC,ORP
- 3 -Out
- 4 - Manual sampling point
- 5 - Filter
- 6 - In
- 7 - Flow sensor
- 8 - Temperature sensor
- 9 - Automatic flow regulation

DIMENSIONS

