


## DESCRIPCIÓN

The Multifunction sensor holder is able to hold up to two sensors: pH, RedOx(ORP), electric conductivity(EC), free chlorine (Cl).  
 Includes automatic flow regulation system, on-line filter and manual sampling point.  
 Optional to include temperature sensors and proximity sensor for flow failure detection

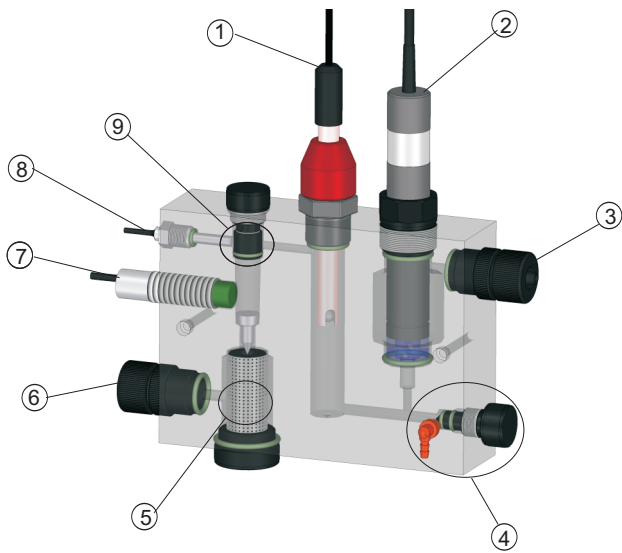

- 1 - pH SENSOR
- 2 - Free chlorine Sensor, EC,ORP
- 3 -Out
- 4 - Manual sampling point
- 5 - Filter
- 6 - In
- 7 - Flow sensor
- 8 - Temperature sensor
- 9 - Automatic flow regulation

## TECHNICAL FEATURES

**Materials;** PMMA, PP, NBR, SS316  
**Maximum pressure:** 6 bar (87 PSI)  
**Filter :** 100 mesh  
**Automatic flow regulation:** 50 L/H (13GPH)

## DIMENSIONS

