

COMPACT V CP: TECHNICAL FEATURES

Power Supply:

230VAC (+/-20%) 50/60Hz

Protection: IP55

Working Temperature: 0 -45°C

Relative Humidity max: 95% (without Condensation)

Inputs:

-Flow: Pulses Input for high-Frequency Flow Meters (padlewheel or electromagnetic)

- EC: Input for the ITC Conductivity Sensor.


- PH: Input optically insulated for connecting a pH Sensor.

Outputs:

- 1 analogue output 4-20mA for Dosing Pump (inverter)

- Flow Alarm Output

- EC/PH Alarm Output

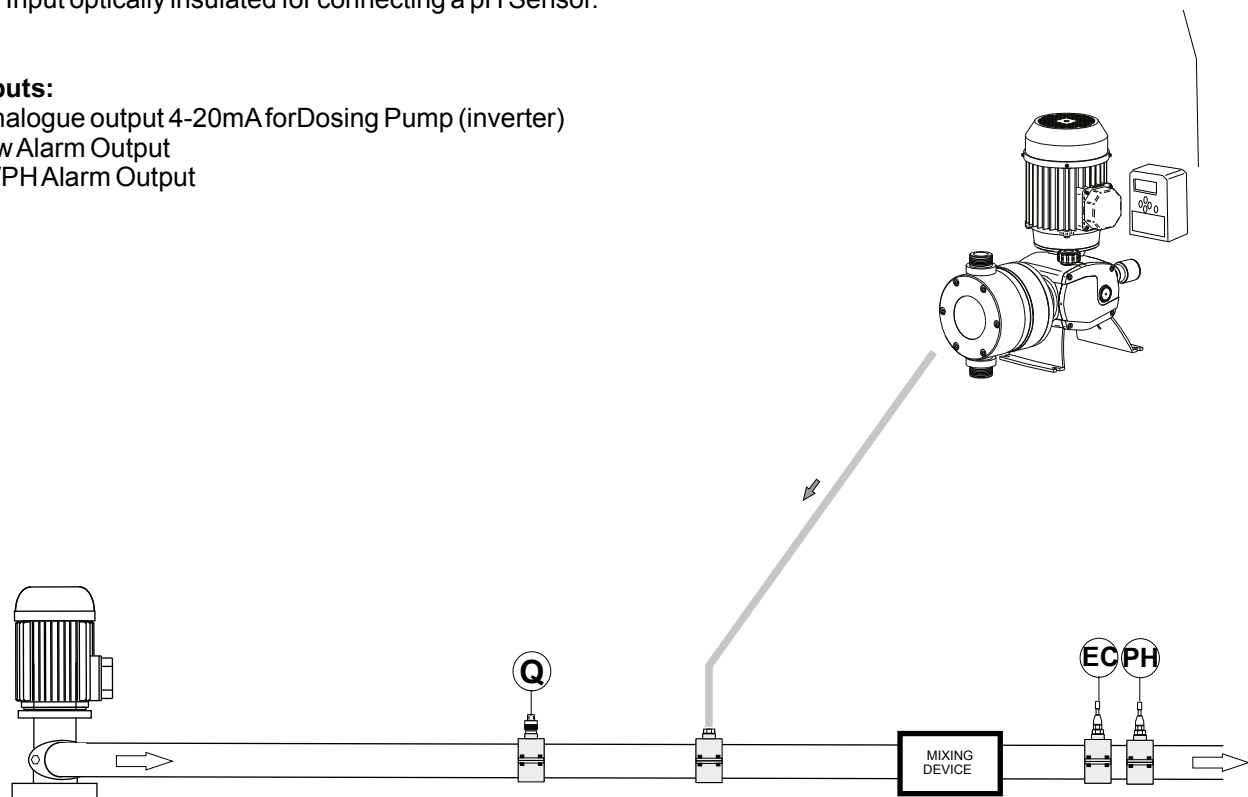

Dimensions

