


DESCRIPTION

EI GATE-Dostec AC allows to monitor real-time parameters such as flow rate, motor speed, pulse and sensor inputs, etc. It also allows to receive sms and emails alarms, configurable through the platform.

GENERAL COMMUNICATION SCHEMA

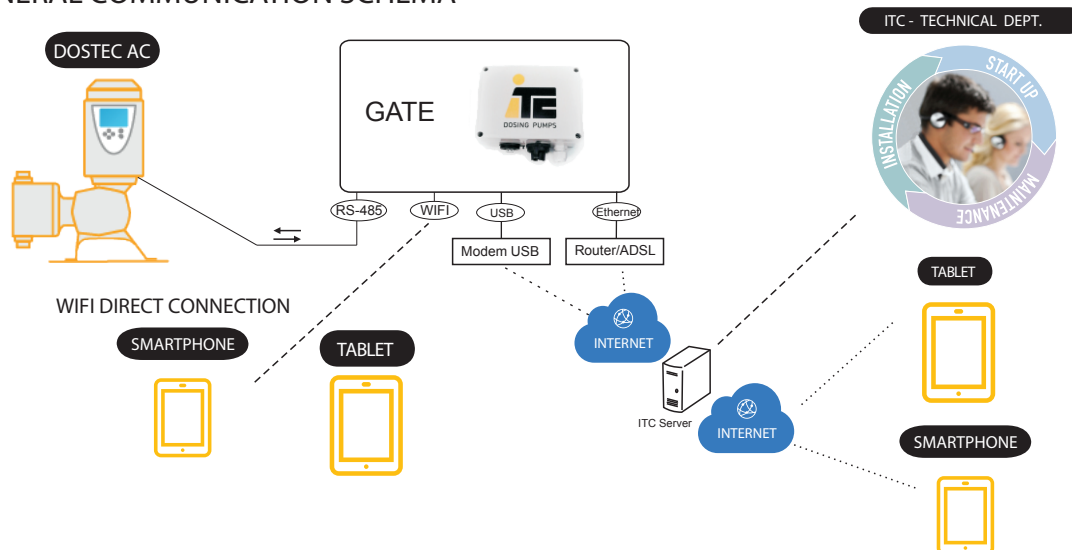

TECHNICAL FEATURES

Supply voltage: 85-264Vac, 50/60Hz
 Power: 6W
 Temperature: 0-45°C
 Relative humidity: 0-95% no condensation
 Dimensions: 160x80x90mm
 Conectivity:
 Ethernet, ADSL connection, router 3G.
 Modem USB, accesory for good telephonic reception without outdoors antenna
 Wifi, for a direct connection using a tablet or smartphone.
 Connections:


wifi:	- A B	-	- +	- +		L	N
password:webscada	RS	IN	dry	OUT	IN	100-240	
http://1.2.3.4:7777	485	contact		12Vdc		Vac	

Ref.: 01-004



ACCESORIES

- 40653 Modem USB 3G
- 01-015 Router 3G with indoors antenna and 1m ethernet cable IP 68
- 01-013 1m ethernet cable IP 68
- 01636 Outdoors antenna with 5m cable

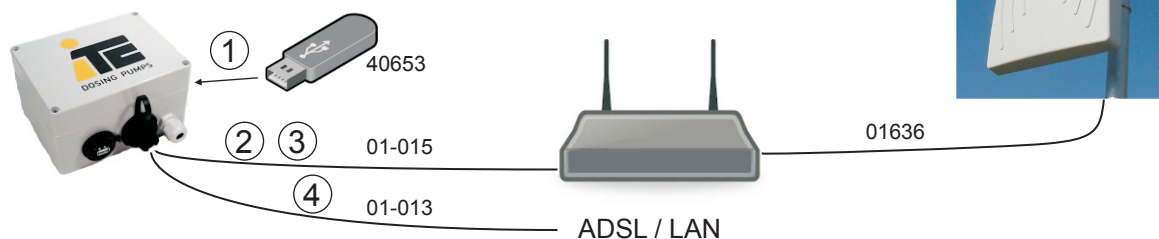


OPTIONS:

- 1.- GATE(01-001)+ modem USB(40653), for good reception.
- 2.- GATE(01-001)+ Router 3G (01-015), for medium reception.
- 3.- GATE(01-001)+ Router 3G (01-015) + outdoors antenna (01636), for poor reception.
- 4.- GATE(01-001)+ ethernet cable (01-013), to connect at the customer LAN.



FUNCTIONALITIES:

Mobile application to manage easily the smart dosing pump Dostec AC.

CONECTIVITY

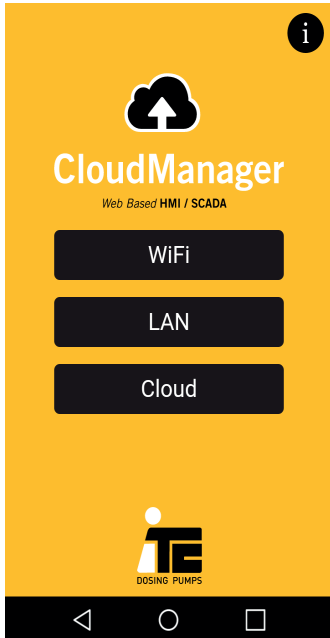

CONTROL PANEL

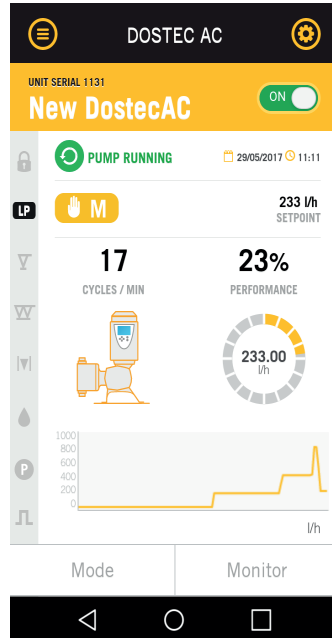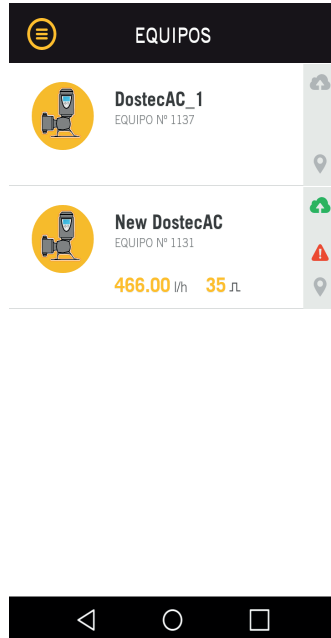

Configuration

Start/Stop



Pump state

Dosing Mode

Real time flow dosed

Graphics

ALARMS CONFIGURATION, SET UP MENU.

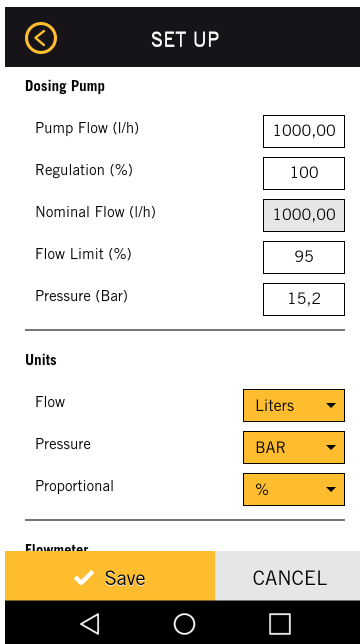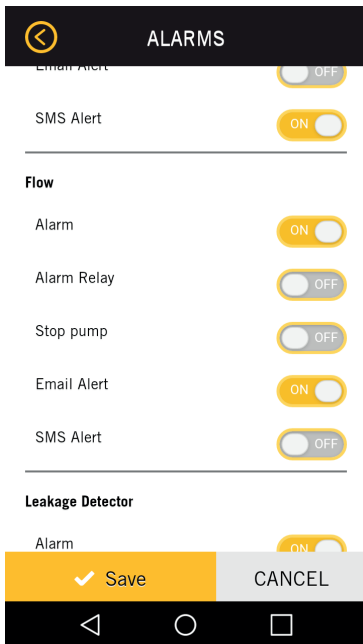

REAL TIME PARAMETERS OF DOSTEC AC

