
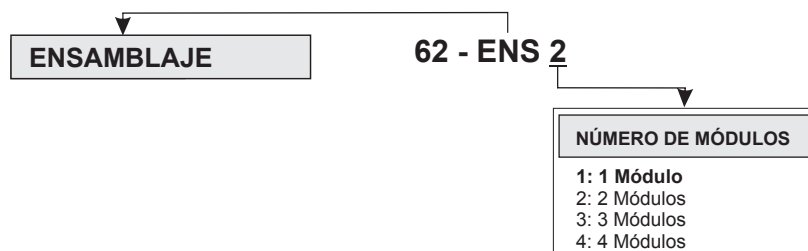
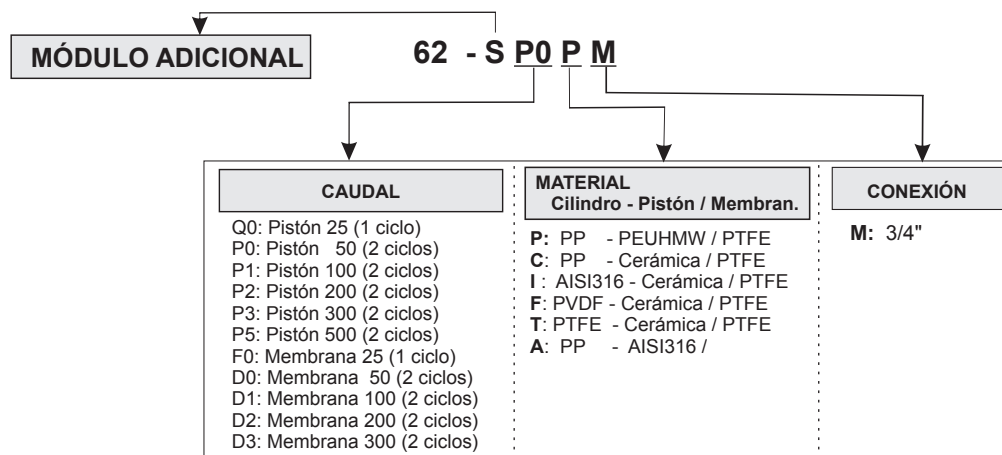


### FORMULACIÓN DE CÓDIGOS

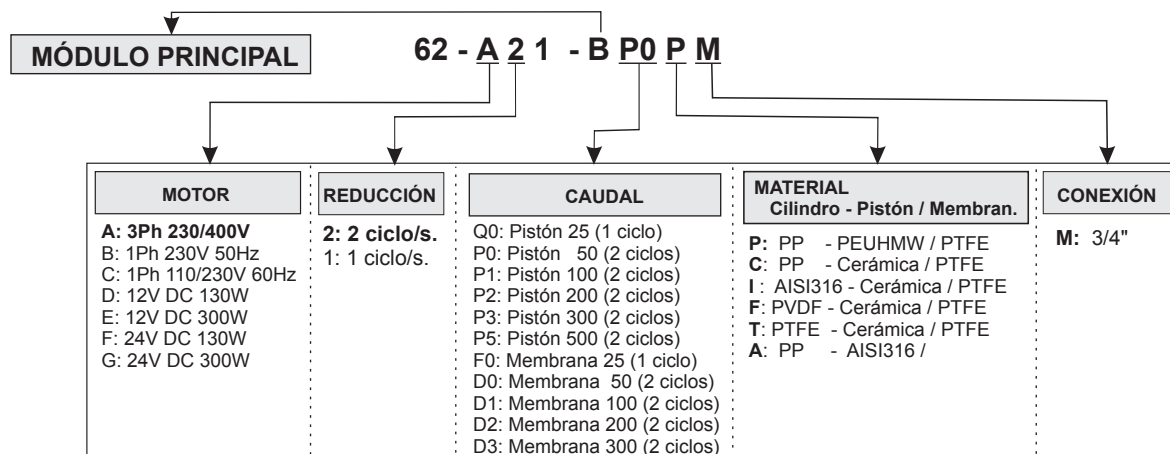

### CAUDAL - PRESIÓN

	CÓDIGO	CAUDAL				PRESSURE	
		50Hz		60Hz		bar	PSI
		l/h	GPH	l/h	GPH		
	<b>62-A11-BQ0_M</b>	25	6,6	30	7.5	15	217
	<b>62-A21-BP0_M</b>	50	13	60	15	15	217
	<b>62-A21-BP1_M</b>	100	26	120	30	15	217
	<b>62-A21-BP2_M</b>	200	53	240	60	8	116
	<b>62-A21-BP3_M</b>	300	79	360	90	5	73
	<b>62-A21-BP5_M</b>	500	132	600	150	3	43

	CÓDIGO	CAUDAL				PRESIÓN	
		50Hz		60Hz		bar	PSI
		l/h	GPH	l/h	GPH		
	<b>62-A11-BF0_M</b>	25-18,5	6.6-4.9	30-22.2	7.5 - 5,7	10	145
	<b>62-A21-BD0_M</b>	50-37	13,2-9,8	60-44,4	15 - 11	10	145
	<b>62-A21-BD1_M</b>	100-86	26,4-22,7	120-103	30 - 27	10	145
	<b>62-A21-BD2_M</b>	200-165	52.8-43,5	240-198	60 - 50	6	87
	<b>62-A21-BD3_M</b>	300-245	79 - 65	360-294	90 - 78	4	58

# MF: CARACTERÍSTICAS TÉCNICAS

**CORRIENTE ELÉCTRICA:** La indicada en la placa de características del motor  
**POTENCIA:** 0.37 KW (0.5 Hp)

**PROTECCIÓN :** IP-55


**MATERIALES:**

Pistón: PEUAPM / Cerámico  
 Membrana : Base de elastómero reforzado con fibra y revestimiento de PTFE  
 Cilindro: PP / PVDF / AISI316  
 Válvulas(cuerpo): PP/ PVDF/ AISI316  
 Válvulas(bola): Vidrio / vidrio borosilicato / cerámica  
 Retención: FPM / EPDM

**NIVEL DE RUIDO dB(A):** menor de 70

## DIMENSIONES


**mm**

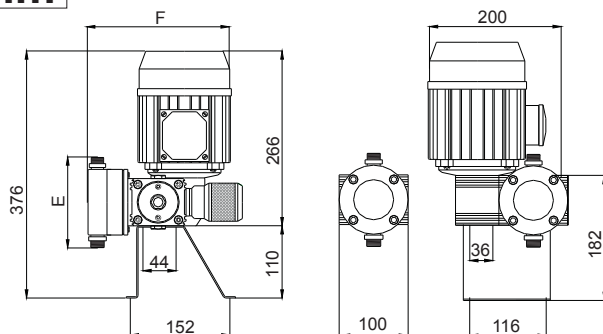

Pistón		
I/h	E	F
50-100	154	255
200-300	154	255
500	170	270

Membrana		
I/h	E	F
50-100	154	213
200	184	218
300	204	218

**in**

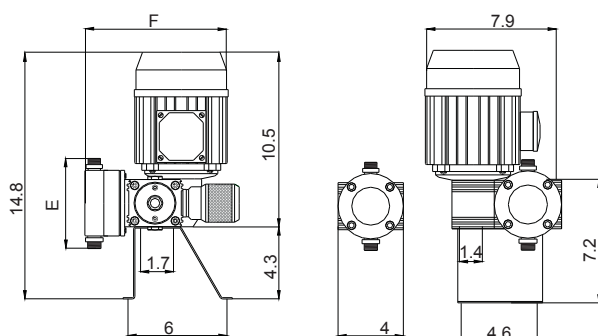

Pistón		
I/h	E	F
50-100	6.1	10
200-300	6.1	10
500	6.7	10.6

Membrana		
L/h	E	F
50-100	6,1	8,4
200	7,2	8,6
300	8	8,6

### MÓDULOS DE INYECCIÓN

		DIMENSIONES		PESOS	
		mm	in	Kg	lb
1	A	200	7.9	12	26.5
2	B	265	10.5	14.5	32
3	C	365	15	17	37.6
4	D	465	18.3	19.5	43

