

WTR PRO Cl₂: TECHNICAL FEATURES



WTR 005

Power Supply:

230VAC (+/-10%) 50/60Hz

12V DC

Protection: IP65

Working Temperature: 0 -45°C

Relative Humidity max: 95% (without Condensation)

Inputs:

-Free chlorine: Input optically isolated for ITC free chlorine sensor

-Flow: Pulses Input optically isolated for high-Frequency Flow Meters (padlewheel or electromagnetic)

- PH: Input optically isolated for connecting a pH sensor. Temperature compensated

- Temperature: Pt100


Outputs:

-2 analogue Outputs 4-20mA for Dosing Pumps. Control output with PI adjustment

-2 analogue Outputs 4-20mA for register pH and Chlorine

- Chlorine Alarm Output: Relay Output NO. 24 VAC -1A max.

- PH Alarm Output: Relay Output NO. 24 VAC -1A max.

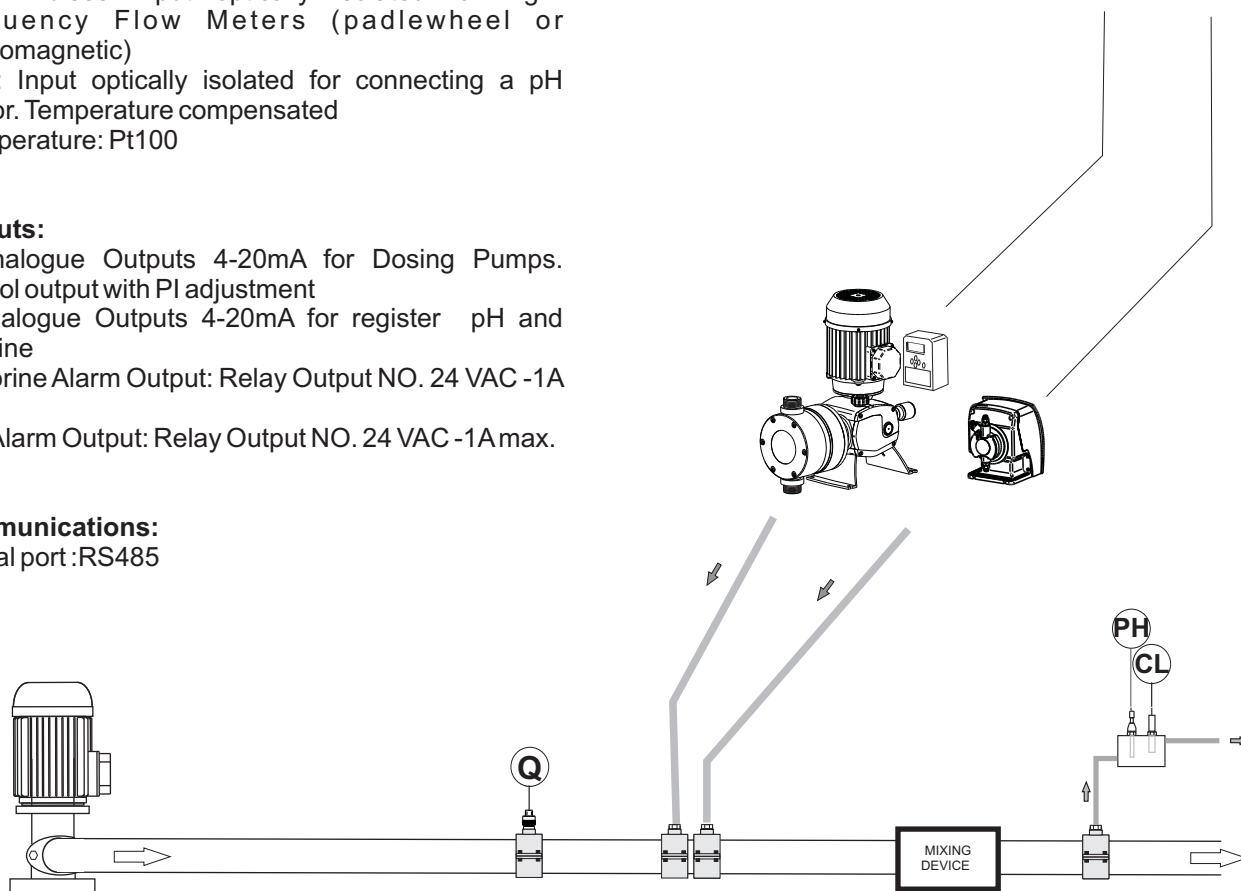

Dimensions

