

MODELS

- DOSITEC - WMD: Manual regulation from 0 to 100% by keyboard.
- DOSITEC - WMF: Multifunction (Manual flow regulation / proportional /Analogic 4-20mA)

DESCRIPTION

- 4 different languages menu: English, Spanish, French and Italian
- Flow rate visualisation in %
- 8 x 2 Backlit digital display
- Wall mount
- Degassing Head (optional)
- IP 65 protection
- CE approved



Standard options

Head/valves	PVDF
Balls	Pyrex®
Diaphragm	PTFE
Sealings	Viton®
Power Supply	230 Vac 50 Hz
Net Weight	2,6 kg


Accesories kit (included)

Foot filter	PP fittings 4 x 6 lip valve
Injection Valve	PVDF fittings 4 x 6 ball valve
Suction Tube	PVC 4 x 6
Delivery Tube	PE 4 x 6 (x2)


TECHNICAL SPECIFICATIONS

Flow l/h	Pressure Bar	C/min	Volum ml/cicle	Stroke length mm	Power supply Volts	Power Watts	Weight Kg	Codes	
								WMD	WMF
2	18	150	0.22	1	230V AC	60 (0.25A)	4	59-171	59-181
5	10	150	0.55	1.1	230V AC	60 (0.25A)	4	59-172	59-182
8	8	150	1.11	1.3	230V AC	60 (0.25A)	4	59-173	59-183
20	3	150	2	1.9	230V AC	60 (0.25A)	4	59-174	59-184
Models with automatic purge									
5	10	150	0.55	1.1	230V AC	60 (0.25A)	4	59-176	59-186
7	7	150	1.11	1.3	230V AC	60 (0.25A)	4	59-177	59-187

FLOW - PRESSURE

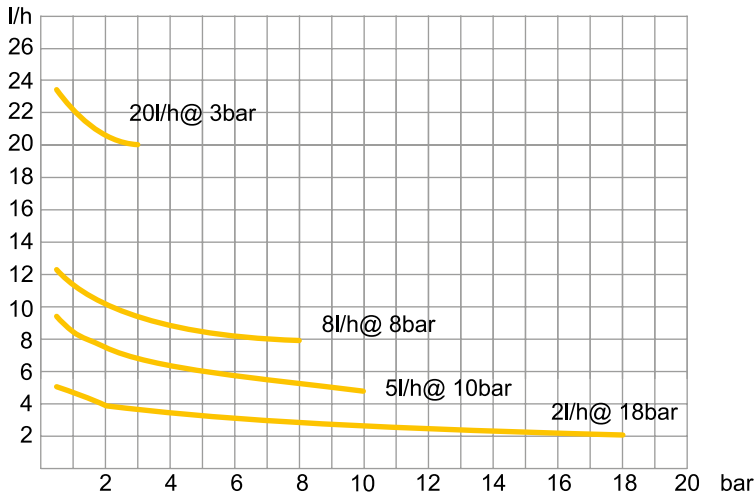

Models with automatic purge

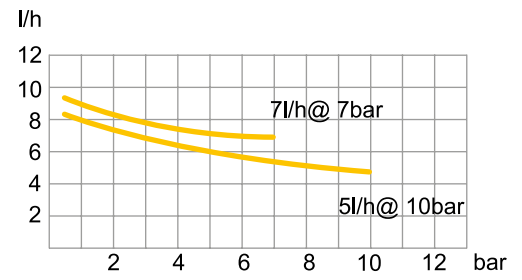

DIMENSIONS

